


# AES67-108 G2

The AES67-108 G2 is an Artist client card compatible with all Riedel Artist G2 frames. This add-on card enables users to take advantage of AES67 audio networks.

The AES67 client card is easily installed into the Artist mainframe and then configurable through the Director software. The interface allows AES67 connectivity between the Artist and Smartpanels and other compatible devices. The card features eight independent AES67 connections to service multiple devices.

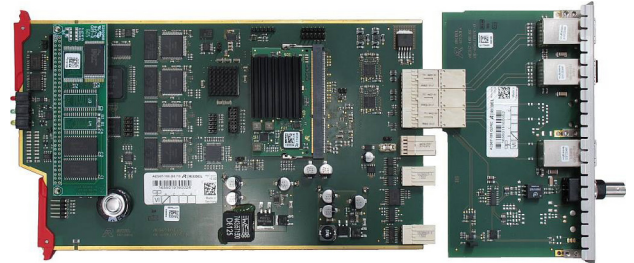

## Technical Specifications

### Status LEDs

	Off	On	Blinking	Flashing temporarily	Flashing all together
Red	Ok	Error	--	--	Reset / Firmware update
Green	--	Error	Ok	No CPU	
Yellow	--	No Configuration / Firmware Conflict		--	

### Outputs

Wordclock	TTL / 75 Ω
Sample Rate	48 kHz ±10%

### Pinout

AES67 1/2 (RJ45)*		ETH 1 (RJ45)		WCLK OUT (BNC)	
Pin	Signal	Pin	Signal	Pin	Signal
1	Tx/Rx_A +	1	TX +	1	TX +
2	Tx/Rx_A -	2	TX -	2	TX -
3	Tx/Rx_B +	3	RX +		
4	Tx/Rx_C +	4	--		
5	Tx/Rx_C -	5	--		
6	Tx/Rx_B -	6	RX -		
7	Tx/Rx_D +	7	--		
8	Tx/Rx_D -	8	--		

\* Please use the "AES67 1" interface for all connections.

### Overall

Product Name	AES67-108 G2
Article Numbers	1020021 (Front Card) 1020022 (Rear Card) 1040019 (Card Set)
Form Factor	Artist G2 Client Card
Environmental Temperature	-5 °C to +55 °C (Non-condensing)
Supply Voltage	24 VDC
Fuse	2 A
Dimensions (w×h×d)	150 × 20 × 278 mm (Front Card) 160 × 20 × 120 mm (Rear Card)
Weight	270 g (Front Card) 130 g (Rear Card)