


DANTE-108 G2

The DANTE-108 G2 is an Artist client card compatible with all Riedel Artist G2 frames. This add-on card enables users to take advantage of Dante™ audio networks.

The Dante™ client card is easily installed into the Artist mainframe and then configurable through the Director software. The interface allows connectivity between the Artist and Dante™ compatible devices. The card features eight independent Dante™ connections to service multiple devices.

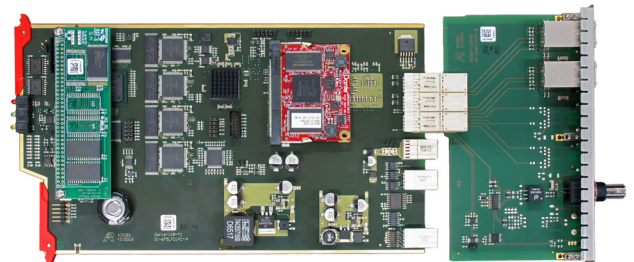

Technical Specifications

Status LEDs

	Off	On	Blinking	Flashing temporarily	Flashing all together
Red	Ok	Error	--	--	Reset / Firmware update
Green	--	Error	Ok	No CPU	
Yellow	--	No Configuration / Firmware Conflict		--	

Outputs

Wordclock	TTL / 75 Ω
Sample Rate	48 kHz ±10%

Pinout

Primary/Secondary (RJ45)		WCLK OUT (BNC)	
Pin	Signal	Pin	Signal
1	Tx/Rx_A +	1	TX +
2	Tx/Rx_A -	2	TX -
3	Tx/Rx_B +		
4	Tx/Rx_C +		
5	Tx/Rx_C -		
6	Tx/Rx_B -		
7	Tx/Rx_D +		
8	Tx/Rx_D -		

Overall

Product Name	DANTE-108 G2
Article Numbers	1020023 (Front Card) 1020024 (Rear Card) 1040020 (Card Set)
Form Factor	Artist G2 Client Card
Environmental Temperature	-5 °C to +55 °C (Non-condensing)
Supply Voltage	24 VDC
Fuse	2 A
Dimensions (w×h×d)	150 × 20 × 278 mm (Front Card) 160 × 20 × 120 mm (Rear Card)
Weight	260 g (Front Card) 110 g (Rear Card)